KZN SAFETY AND GEAR

BOVA

SAFETY WEAR

CATALOGUE - VOL 3



ENGINEERED WITH PURPOSE



E N G I N E E R E D W I T H P U R P O S E

BOVA cemented their reputation in Africa by delivering high quality engineering through their range of safety footwear. 21 years after producing their first safety boot, BOVA extended their portfolio to include work wear, thermal protection and fall protection.

When designing new products, we explore the varied dangers inherent in an industry and then engineer the product purposed with protecting employees within those environments. For procurement and those we protect, this means utilising our category ranges to ensure that the required safety needs are met. Different employees within the same industry often require very different levels of protection. Through an understanding of the varied dangers faced by an employee in their work environment and applying the correct product, clients can ensure that they do not under-spec for some employees, thereby compromising on safety or over-spec for others – and compromise on cost-effectiveness.

All Bova products are manufactured in ISO 9001 accredited facilities, utilising cutting-edge technology and innovations. In this way, we can ensure that what we release into the market performs with the purpose for which it was engineered.

B O V A E P I T O M I S E S E N G I N E E R E D E X C E L L E N C E , W I T H A C L E A R P U R P O S E .

CONTENTS

FOOTWEAR	**PG 7-13**
LIGHTWEAR RANGE	**PG 7**
• EXECUTIVE	PG 7
HEAVYWEAR RANGE	**PG 7-10**
• CORE	PG 7-8
• TRAX	PG 9
• AKTIV	PG 10
EXTREMEWEAR RANGE	**PG 11-12**
• PU/RUBBER	PG 11-12
• PU VIBRAM RANGE	PG 12
PARAMILITARY RANGE	**PG 13**
• LEATHER	PG 13
• CANVAS	PG 13
WORK AT HEIGHTS	**PG 14-23**
GENERALWEAR RANGE	**PG 15-17**
• CORE	PG 15-16
• CORE+	PG 16-17
HEAVYWEAR RANGE	**PG 17-18**
• UNDERGROUND MINING	PG 17
• MULTI-PURPOSE	PG 17
• ROPE ACCESS & RESCUE	PG 18
EXTREMEWEAR RANGE	**PG 18-19**
• MINING	PG 18
• ELECTRICAL	PG 18
• WELDING	PG 19
LANYARD RANGE	**PG 19-21**
• STANDARD LANYARDS	PG 19-20
• SPECIALISED LANYARDS	PG 21
ACCESSORIES RANGE	**PG 22**
• CLIMBING SLINGS	PG 22
• ANCHOR STRAPS	PG 22
BELT RANGE	**PG 23**
• CAP LAMP BELT	PG 23
• LINESMAN BELT	PG 23
TEMPORARY LIFELINES	**PG 23**
• TEMPORARY HORIZONTAL LIFELINE	PG 23
• TEMPORARY VERTICAL LIFELINE	PG 23
WORKWEAR	**PG 24-28**
CONTI SUIT RANGE	**PG 25-27**
• 65/35 POLY COTTON	PG 25
• POLY VISCOSE	PG 26
• J54 100% COTTON	PG 26
• DENIM CONTI SUITS	PG 27
• D59 100% COTTON	PG 27
• HIGH VIZ	PG 27
BOILER SUIT RANGE	**PG 28**
• J54 100% COTTON	PG 28
• D59 100% COTTON	PG 28
DUST COAT RANGE	**PG 28**
• 65/35 POLY COTTON	PG 28
• ACID RESISTANT	PG 28
HIGH VISIBILTY SHIRTS RANGE	**PG 28**
• SHIRTS	PG 28
SIZE CHART	**PG 29**
CHEMICAL RESISTANCE TABLE	**PG 30**


BOVA
FOOTWEAR


BOVA
FALL PROTECTION


BOVA
WORKWEAR

BOVA FOOTWEAR

INNOVATIVE SOLING TECHNOLOGIES

BOVA Footwear explores the varied dangers inherent in an industry and then engineers safety footwear purposed with protecting employees within those environments. Different employees within the same industry often require very different levels of protection and therefore different specifications. For procurement and those we protect, this means utilising the 4 unique BOVA Category Ranges: Lightwear, Heavywear, Extremewear and Paramilitary, to ensure that required safety needs are met.

BOVA WORKWEAR

QUALITY ENGINEERING THAT FITS

Our workwear range is focused on providing clients with high quality garments that are built to last, designed to fit and engineered to protect. Our wide offering ensures that we are able to meet the varying requirements of the industrial sector in terms of materials, colours and finishes, whilst our design and innovation team are on hand to work with clients on customising garments according to specific needs and branding specifications. All garments featuring 100% cotton are proudly manufactured from locally sourced fabrics in support of our broader South African Economy.

BOVA FALL PROTECTION

TAKING SAFETY TO NEW HEIGHTS

Our Fall Arrest range of belted and non-belted harnesses have raised the bar of engineering excellence within the non-specialised fall arrest category. Available in five different variations, with 45mm webbing throughout and adjustment features that adapt to fit all sizes, our range of Fall Arrest systems meet the varying needs and preferences of the industrial sector.

MADE IN SA

PROUDLY SOUTH AFRICAN
All products within the BOVA Safety Wear range are proudly manufactured in South Africa.

CE SABS APPROVED EN

BOVA

FOOTWEAR

INNOVATIVE SOLING TECHNOLOGIES



ENGINEERED WITH PURPOSE

LIGHTWEAR RANGE

Durable safety solutions for everyday light business hazards

EXECUTIVE RANGE

OXFORD: 70006 ♂

ANTI-STATIC



Sizes
5-12

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Single Density PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345 NRCS/9002/287766/0407

LIGHTWEAR RANGE

Durable safety solutions for everyday light business hazards

UTILITY RANGE

ADAPT: 71442 ♂

ANTI-STATIC



Sizes
5-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Single Density PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345 NRCS/9002/287766/0119

HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

CORE RANGE

HAMBURG: 90008 ♂

ANTI-STATIC



Sizes
4-12

Colour
Grey

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Dual Density PU/PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345 NRCS/9002/287766/0116

LIGHTWEAR RANGE

Durable safety solutions for everyday light business hazards

EXECUTIVE RANGE

JARMAN: 70003 ♂

ANTI-STATIC



Sizes
5-12

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Single Density PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

EN/ISO 20345 SANS/ISO20345

LIGHTWEAR RANGE

Durable safety solutions for everyday light business hazards

UTILITY RANGE

MULTI: 71441 ♂

ANTI-STATIC



Sizes
5-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Single Density PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345 NRCS/9002/287766/0120

HEAVYWEAR RANGE

Durable safety solutions for everyday light business hazards

CORE RANGE

TRAINER: 60012 ♂

ANTI-STATIC



Sizes
4-12

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Dual Density PU/PU (Heat-resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345 NRCS/9002/287766/0171

HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

CORE RANGE

MAVERICK: 60002 ♂



ANTI-STATIC

CE

ultrafresh

Sizes
4-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Dual Density PU/PU (Heat resistant up to 95°C)
MIDSOLE: SMS available (60702)

EN / ISO 20345 **NRCS/9002/287766/0169**

HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

CORE RANGE

RADICAL: 60001 ♂



ANTI-STATIC

CE

ultrafresh

Sizes
4-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Dual Density PU/PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

EN / ISO 20345 **NRCS/9002/287766/0165**

HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

CORE RANGE

NEOFLEX: 90004 ♂



ANTI-STATIC

EXTENDED SIZE RANGE

CE

ultrafresh

Sizes
3-15

Colour
Black & Richmond (MTO)

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Dual Density PU/PU (Heat resistant up to 95°C)
MIDSOLE: SMS available (90704 / Black only)

EN / ISO 20345 **NRCS/9002/287766/0055**

HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

CORE RANGE

NEOGRIP: 90005 ♂



ANTI-STATIC

CE

ultrafresh

Sizes
5-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Dual Density PU/PU (Heat resistant up to 95°C)
MIDSOLE: SMS available (90705 / Black only / MTO)

EN / ISO 20345 **NRCS/9002/287766/0117**

HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

CORE RANGE

CHELSEA: 90006 ♂



ANTI-STATIC

CE

ultrafresh

Sizes
3-13

Colour
Black & Brown

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Dual Density PU/PU (Heat resistant up to 95°C)
MIDSOLE: APT midsole available (90606)

EN / ISO 20345 **NRCS/9002/287766/0170**

HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

TRAX RANGE

AMATHOLE: 21018 ♂



SRC SLIP RESISTANCE RATING

ANTI-STATIC

ERGONOMIC DESIGN APPROVED BY A PODIATRIST

CE

ultrafresh

Sizes
5-13

Colour
Black with silver stripes &
Black with green stripes

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide fitting
SOLE: Dual Density PU/PU (Heat resistant up to 95°C)
MIDSOLE: APT Midsole available (21618)

EN / ISO 20345 **NRCS/9002/287766/0389**

HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

TRAX RANGE

MUNICH 2.0: 21002 ♂



SRC SLIP RESISTANCE RATING

ANTI-STATIC

ERGONOMIC DESIGN APPROVED BY A PODIATRIST

FREE ROVER TOOL

ultrafresh

Sizes
5-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide fitting
SOLE: Dual Density PU/PU (Heat resistant up to 95°C)
MIDSOLE: SMS available (21702)

EN / ISO 20345

HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

TRAX RANGE

BREMEN 2.0: 21001 ♂



SRC SLIP RESISTANCE RATING

ANTI-STATIC

ERGONOMIC DESIGN APPROVED BY A PODIATRIST

FREE ROVER TOOL

ultrafresh

Sizes
5-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide fitting
SOLE: Dual Density PU/PU (Heat resistant up to 95°C)
MIDSOLE: SMS available (21701)

EN / ISO 20345

HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

TRAX RANGE

HIKER 2.0: 21013 ♂



SRC SLIP RESISTANCE RATING

ANTI-STATIC

ERGONOMIC DESIGN APPROVED BY A PODIATRIST

ultrafresh

Sizes
3-13

Colour
Black & Brown

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide fitting.
SOLE: Dual Density PU/PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

EN / ISO 20345 NRCS/9002/287766/0390

HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

TRAX RANGE

TAHOE: 21021 ♂



SRC SLIP RESISTANCE RATING

ANTI-STATIC

ERGONOMIC DESIGN APPROVED BY A PODIATRIST

FREE ROVER TOOL

ultrafresh

Sizes
5-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide fitting
SOLE: Dual Density PU/PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

EN / ISO 20345 NRCS/9002/287766/0432

HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

AKTIV RANGE

COLUMBIA: 30005 ♂



ANTI-STATIC

METAL FREE

SABS APPROVED

ultrafresh

CE

ERGONOMIC DESIGN APPROVED BY A PODIATRIST

Sizes
5-12

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Composite
SOLE: Dual Density PU/PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

EN / ISO 20345

HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

AKTIV RANGE

ATLANTIS: 30006 ♂



ANTI-STATIC

METAL FREE

SABS APPROVED

ultrafresh

ERGONOMIC DESIGN APPROVED BY A PODIATRIST

Sizes
5-12

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Composite
SOLE: Dual Density PU/PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345

EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU RUBBER RANGE

METAGUARD: 42005 ♂



NON CONDUCTIVE

WITH METATARSAL PROTECTION ENGINEERING

Sizes
4-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Dual Density PU/Rubber (Heat resistant up to 300°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345

EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU RUBBER RANGE

WILDLAND: 42899 ♂



NON CONDUCTIVE

Sizes
4-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Dual Density PU/Rubber (Heat resistant up to 300°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345

EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/RUBBER RANGE

FREEZER: 42018 ♂



NON CONDUCTIVE

3M THINSULATE MATERIAL

Sizes
5-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Dual Density PU/Rubber (Cold resistant down to -25°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345 NRCS/9002/287766/0426

EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU RUBBER RANGE

FIREWALK: 42003 ♂



ELECTRICAL RESISTANCE TO 20 KVA FOR 60 SECONDS (ESKOM SPEC 34-232)

NON CONDUCTIVE

Sizes
4-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Dual Density PU/Rubber (Heat resistant up to 300°C)
MIDSOLE: APT midsole available (44603)

SANS / ISO 20345 NRCS/9002/287766/0134

EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU RUBBER RANGE

WELDERS: 42004 ♂



NON CONDUCTIVE

WITH SPAT COVERING

Sizes
4-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Dual Density PU/Rubber (Heat resistant up to 300°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345

EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/RUBBER RANGE

SMELTERS BUCKLE: 42007 ♂



NON CONDUCTIVE

WITH KEVLAR FEATURES

Sizes
4-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Aluminium
SOLE: Dual Density PU/Rubber (Heat resistant up to 300°C)
MIDSOLE: APT Midsole available (42607)

EN / ISO 20345 NRCS/9002/287766/0327

EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/RUBBER RANGE

SMELTERS VELCRO: 42006 ♂



NON CONDUCTIVE

WITH KEVLAR FEATURES

Sizes
4-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Aluminium
SOLE: Dual Density PU/Rubber (Heat resistant up to 300°C)
MIDSOLE: APT Midsole available (42608)

EN / ISO 20345 **NRCS/9002/287766/0326**

EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/VIBRAM RANGE

RIGGER PRO: 43605 ♂



NON CONDUCTIVE

SRC SLIP RESISTANCE RATING

ELECTRICAL RESISTANCE TO 20 KVA FOR 60 SECONDS (ESKOM SPEC 34-232)

ERGONOMIC DESIGN APPROVED BY A PODIATRIST

Sizes
5-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-Wide Fitting
SOLE: Dual Density PU/Vibram Rubber (Heat resistant up to 300°C)
MIDSOLE: Standard with APT

EN/ISO 20345 **NRCS/9002/287766/0442**

EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/VIBRAM RANGE

DROGUE: 43602 ♂



NON CONDUCTIVE

SRC SLIP RESISTANCE RATING

ELECTRICAL RESISTANCE TO 20 KVA FOR 60 SECONDS (ESKOM SPEC 34-232)

ERGONOMIC DESIGN APPROVED BY A PODIATRIST

Sizes
4-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide Fitting
SOLE: Dual Density PU/Vibram Rubber (Heat resistant up to 300°C)
MIDSOLE: Standard with APT

SANS / ISO 20345 **NRCS/9002/287766/0437**

EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/RUBBER RANGE

SMELTERS METAGUARD: 42008 ♂



NON CONDUCTIVE

WITH KEVLAR FEATURES

WITH METATARSAL PROTECTION ENGINEERING

Sizes
5-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Aluminium
SOLE: Dual Density PU/Rubber (Heat resistant up to 300°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345

EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/VIBRAM ARANGE

NEBULA: 43603 ♂



NON CONDUCTIVE

SRC SLIP RESISTANCE RATING

ELECTRICAL RESISTANCE TO 20 KVA FOR 60 SECONDS (ESKOM SPEC 34-232)

ERGONOMIC DESIGN APPROVED BY A PODIATRIST

Sizes
4-13

Colour
Brown

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide Fitting
SOLE: Dual Density PU/Vibram Rubber (Heat resistant up to 300°C)
MIDSOLE: Standard with APT

SANS / ISO 20345

EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/VIBRAM RANGE

ROCNA: 43601 ♂



NON CONDUCTIVE

SRC SLIP RESISTANCE RATING

ELECTRICAL RESISTANCE TO 20 KVA FOR 60 SECONDS (ESKOM SPEC 34-232)

ERGONOMIC DESIGN APPROVED BY A PODIATRIST

Sizes
4-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide Fitting
SOLE: Dual Density PU/Vibram Rubber (Heat resistant up to 300°C)
MIDSOLE: Standard with APT

SANS / ISO 20345

PARAMILITARY RANGE

Purpose-engineered safety boots for security, paramilitary and policing operations

LEATHER RANGE

POLICE: 90498 ♂



ANTI-STATIC

Sizes
3-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Double Density PU/PU (Heat resistant up to 95°C)
MIDSOLE : Shank reinforcement for arch support

EN / ISO 20345 **NRCS/9002/287766/0179**

PARAMILITARY RANGE

Purpose-engineered safety boots for security, paramilitary and policing operations

CANVAS RANGE

RANGER: 83029 ♂



ANTI-STATIC

Sizes
4-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: No toe cap
SOLE: Single Density PU (Heat resistant up to 95°C)

SANS/ISO 20347

PARAMILITARY RANGE

Purpose-engineered safety boots for security, paramilitary and policing operations

LEATHER RANGE

SWAT: 90561 ♂



ANTI-STATIC

Sizes
3-13

Colour
Black & Walnut

SPECIFIC FEATURES:

TOE CAP: No toe cap
SOLE: Double Density PU/PU (Heat resistant up to 95°C)
Available with Single Density PU/PU (71561)
MIDSOLE: Shank reinforcement for arch support

SANS/ISO 20347

PARAMILITARY RANGE

Purpose-engineered safety boots for security, paramilitary and policing operations

CANVAS RANGE

GUARD: 83006 ♂



ANTI-STATIC

Sizes
4-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: No toe cap
SOLE: Single Density PU (Heat resistant up to 95°C)

SANS/ISO 20347

BOVA

FALL PROTECTION



ENGINEERED WITH PURPOSE

GENERALWEAR RANGE - **CORE**

CODE: HARN01000

FULL BODY HARNESS

WITH STANDING STEP



SPECIFIC FEATURES:

SIZING: • **ONE SIZE FITS ALL**
STANDARDS: • SANS 50361 | EN 361
FEATURES: • Adjustable leg & chest straps

MATERIALS:

Harness Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
Buckles: • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN

GENERALWEAR RANGE - **CORE**

CODE: HARN02000

2 POINT HARNESS



SPECIFIC FEATURES:

SIZING: • **ONE SIZE FITS ALL**
STANDARDS: • SANS 50361 | EN 361
FEATURES: • 2 attachment points: Chest & dorsal D-ring
• Adjustable leg & chest straps

MATERIALS:

Harness Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
Buckles: • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN
D-ring: • Corrosion-resistant steel D-rings with a minimum breaking force of 22kN

GENERALWEAR RANGE - **CORE**

CODE: HARN01260

STANDARD HARNESS
DOUBLE LEG LANYARD WITH SCAFF HOOKS

WITH STANDING STEP



SPECIFIC FEATURES:

SIZING: • **ONE SIZE FITS ALL**
STANDARDS: • SANS 50354 | EN 354
SANS 50355 | EN 355
SANS 50361 | EN 361
EN 362
FEATURES: • Adjustable leg & chest straps
• Shock absorbing lanyard

MATERIALS:

Harness Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
Lanyard Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
Lanyard length: • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
Buckles: • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN
Hooks: • Corrosion-resistant steel scaffolding hooks with 50mm gate opening

GENERALWEAR RANGE - **CORE**

CODE: HARN01220

STANDARD HARNESS
DOUBLE LEG LANYARD WITH SCAFF HOOKS



SPECIFIC FEATURES:

SIZING: • **ONE SIZE FITS ALL**
STANDARDS: • SANS 50354 | EN 354
SANS 50355 | EN 355
SANS 50361 | EN 361
EN 362
FEATURES: • Adjustable leg & chest straps
• Shock absorbing lanyard

MATERIALS:

Harness Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
Lanyard Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
Lanyard length: • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
Buckles: • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN
Hooks: • Corrosion-resistant steel scaffolding hooks with 50mm gate opening

GENERALWEAR RANGE - **CORE**

CODE: HARN01250

STANDARD HARNESS
DOUBLE LEG LANYARD WITH SNAP HOOKS

WITH STANDING STEP



SPECIFIC FEATURES:

SIZING: • **ONE SIZE FITS ALL**

STANDARDS: • SANS 50354 | EN 354
SANS 50355 | EN 355
SANS 50361 | EN 361
EN 362

FEATURES: • Adjustable leg & chest straps
• Shock absorbing lanyard

MATERIALS:

Harness Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard length: • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed

Buckles: • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN

Hooks: • Corrosion-resistant steel snap hooks with 20mm gate opening that can withstand a force of 22kN

GENERALWEAR RANGE - **CORE**

CODE: HARN01210

STANDARD HARNESS
DOUBLE LEG LANYARD WITH SNAP HOOKS



SPECIFIC FEATURES:

SIZING: • **ONE SIZE FITS ALL**

STANDARDS: • SANS 50354 | EN 354
SANS 50355 | EN 355
SANS 50361 | EN 361
EN 362

FEATURES: • Adjustable leg & chest straps
• Shock absorbing lanyard

MATERIALS:

Harness Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard length: • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed

Buckles: • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN

Hooks: • Corrosion-resistant steel snap hooks with 20mm gate opening that can withstand a force of 22kN

GENERALWEAR RANGE - **CORE**

CODE: HARN01110

NON BELTED HARNESS
SINGLE LEG LANYARD WITH SNAP HOOK



SPECIFIC FEATURES:

SIZING: • **ONE SIZE FITS ALL**

STANDARDS: • SANS 50354 | EN 354
SANS 50355 | EN 355
SANS 50361 | EN 361
EN 362

FEATURES: • Adjustable leg & chest straps
• Shock absorbing lanyard

MATERIALS:

Harness Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard length: • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed

Buckles: • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN

Hook: • Corrosion-resistant steel snap hook with 20mm gate opening that can withstand a force of 22kN

GENERALWEAR RANGE - **CORE+**

CODE: HARN02210

BELTED HARNESS
DOUBLE LEG LANYARD WITH SNAP HOOKS



SPECIFIC FEATURES:

SIZING: • **ONE SIZE FITS ALL**

STANDARDS: • SANS 50354 | EN 354
SANS 50355 | EN 355
SANS 50361 | EN 361
EN 362

FEATURES: • Adjustable shoulder, leg, waist & chest straps
• Shock absorbing lanyard

MATERIALS:

Harness Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard length: • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed

Buckles: • Interlocking, corrosion-resistant steel buckle with a minimum breaking force of 18kN

Hooks: • Corrosion-resistant steel snap hooks with 20mm gate opening that can withstand a force of 22kN

GENERALWEAR RANGE - **CORE+**

CODE: HARN02260

BELTED HARNESS
DOUBLE LEG LANYARD WITH SCAFF HOOKS

WITH STANDING STEP



SPECIFIC FEATURES:

SIZING: • **ONE SIZE FITS ALL**

STANDARDS:
- SANS 50354 | EN 354
  SANS 50355 | EN 355
  SANS 50361 | EN 361
  EN 362

FEATURES:
- Adjustable shoulder, leg, waist & chest straps
- Shock absorbing lanyard

MATERIALS:

Harness Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard length: • 1 750mm when shock absorber is intact - 3 450mm when shock absorber is fully deployed

Buckles: • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN

Hooks: • Corrosion-resistant steel scaffolding hooks with 50mm gate opening

GENERALWEAR RANGE - **CORE+**

CODE: HARN02220

BELTED HARNESS
DOUBLE LEG LANYARD WITH SCAFF HOOKS



SPECIFIC FEATURES:

SIZING: • **ONE SIZE FITS ALL**

STANDARDS:
- SANS 50354 | EN 354
  SANS 50355 | EN 355
  SANS 50361 | EN 361
  EN 362

FEATURES:
- Adjustable shoulder, leg, waist & chest straps
- Shock absorbing lanyard

MATERIALS:

Harness Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard length: • 1 750mm when shock absorber is intact - 3 450mm when shock absorber is fully deployed

Buckles: • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN

Hooks: • Corrosion-resistant steel scaffolding hooks with 50mm gate opening

HEAVYWEAR RANGE - **UNDERGROUND MINING**

EXCAVO - HARN30000

MINING HARNESS



SPECIFIC FEATURES:

SIZING: • **S | M | L | XL**

STANDARDS: • SANS 50361 | EN 361

FEATURES:
- Rescue pack & battery straps
- 3 attachment points: Dorsal D-ring & 2 frontal attachment points
- Adjustable leg, shoulder, chest & waist straps
- Padded waist & shoulder straps
- Standing step

MATERIALS:

Harness Webbing: • 45mm UV-Resistant polyester webbing with a minimum breaking load of 2,6tonnes

Padding: • 5mm laminated foam to spread pressure over a larger area

Buckles: • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN

HEAVYWEAR RANGE - **MULTI-PURPOSE**

AGILIS - HARN40000

MULTI-PURPOSE HARNESS



SPECIFIC FEATURES:

SIZING: • **S | M | L | XL**

STANDARDS:
- SANS 50361 | EN 361
  SANS 50358 | EN 358

FEATURES:
- 4 attachment points: Chest & dorsal D-ring with work positioning D-rings
- Adjustable leg, waist, shoulder & chest straps
- Padded waist
- Standing step

MATERIALS:

Harness Webbing: • 45mm UV-Resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Padding: • 5mm laminated foam to spread pressure over a larger area

Buckles: • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN

HEAVYWEAR RANGE - **ROPE ACCESS & RESCUE**

GORDIAN - HARN50000

ROPE ACCESS & RESCUE HARNESS



SPECIFIC FEATURES:

SIZING: • **S | M | L | XL**

STANDARDS:
- SANS 50361 | EN 361
  SANS 50358 | EN 358
  SANS 50813 | EN 813

FEATURES:
- 5 attachment points: Front waist, chest & dorsal D-ring with work positioning D-rings & Gear loops
- Adjustable leg, waist, shoulder & back straps
- Padding in the leg & waist areas

MATERIALS:

Harness Webbing: • 45mm UV-Resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Padding: • 5mm laminated foam to spread pressure over a larger area

Buckles: • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN

Front Connector: • Steel screw gate carabiner with a minimum breaking strength of 25kN

EXTREMEWEAR RANGEE - **MINING**

KHUMBA - HARN51212

ROPE ACCESS & RESCUE HARNESS



SPECIFIC FEATURES:

SIZING: • **S | M | L | XL**

STANDARDS:
- SANS 50361 | EN 361
  SANS 50358 | EN 358
  SANS 50813 | EN 813

FEATURES:
- 5 Aluminium attachment points
- Adjustable Aluminium quick-release buckles on the leg & waist area with adjustable Aluminium buckles on the shoulder and back strap
- Padding in the leg, waist & shoulder areas
- Standing step
- Flame retardant webbing

MATERIALS:

Harness Webbing: • 45mm UV-Resistant & Flame retardant webbing with a minimum breaking load of 3,2 tonnes

Padding: • 5mm laminated foam encased in a Cordura flame retardant nylon/cotton blend fabric

Buckles: • Aluminium corrosion-resistant quick-release buckles with a minimum breaking force of 18kN

Front Connector: • Steel screw gate carabiner with a min. breaking strength of 25kN

HEAVYWEAR RANGE - **ROPE ACCESS & RESCUE**

GORDIAN PRO - HARN50303

ROPE ACCESS & RESCUE HARNESS



SPECIFIC FEATURES:

SIZING: • **S | M | L | XL**

STANDARDS:
- SANS 50361 | EN 361
  SANS 50358 | EN 358
  SANS 50813 | EN 813

FEATURES:
- 5 attachment points: Front waist, chest & dorsal D-ring with work positioning D-rings & Gear loops
- Adjustable leg, back leg, waist, shoulder & back straps with interlocking & quick-release buckles
- Padding in the leg, waist and shoulder areas

MATERIALS:

Harness Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Padding: • 5mm laminated foam to spread pressure over a large area

Buckles: • Corrosion-resistant steel quick-release buckles with a minimum breaking force of 18kN. Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN

Front Connector: • Steel screw gate carabiner with a minimum breaking strength of 25kN

EXTREMEWEAR RANGE - **ELECTRICAL**

ARC - HARN70000

MULTI PURPOSE HARNESS



SPECIFIC FEATURES:

SIZING: • **S | M | L | XL**

STANDARDS:
- SANS 50358 | EN 358
  SANS 50361 | EN 361
  ASDM F887-13 | ATPV 40Cal/cm²

FEATURES:
- 4 Aluminium attachment points: Chest & dorsal D-ring with work positioning D-rings
- Adjustable Aluminium quick-release buckles on the leg, waist and abdominal area with adjustable Aluminium buckles on the shoulder and back straps
- Padding in the leg, waist, & shoulder areas
- All attachment points, adjustments & padding are covered in full grain leather

MATERIALS:

Harness Webbing: • Fire retardant & ARC flash rated, 45 mm Para-aramid/Meta-aramid blended webbing

Padding: • 5 mm laminated foam encased in full grain leather

Buckles: • Aluminium corrosion-resistant quick-release buckles with a minimum breaking force of 18kN

D-Ring: • Corrosion-resistant Aluminium D-rings with a min. breaking strength of 22kN

EXTREMEWEAR RANGE - **WELDING**

SPARK - HARN60000

WELDING HARNESS



SPECIFIC FEATURES:

SIZING: • **One size fits all**

STANDARDS: • SANS 50361 | EN 361

FEATURES: • 2 Aluminium attachment points: Chest & dorsal D-ring
• Adjustable Aluminium quick-release buckles on the leg & chest straps

MATERIALS:

Harness Webbing: • Flame retardant, 45mm Para-aramid / Meta-aramid blended webbing

Buckles: • Aluminium corrosion-resistant quick-release buckles with a minimum breaking force of 18kN

LANYARD RANGE - **EXTENSIO RANGE**

CODE: WPSR01010

WORK POSITIONING LANYARD



SPECIFIC FEATURES:

SIZING: • **MAX 2000MM**

STANDARDS: • SANS 50358 | EN 358 EN 362

FEATURES: • Two snap hooks
• Adjustable webbing with pvc protector

MATERIALS:

Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard Adjustment: • 800mm - 2 000mm utilising a floating buckle

Buckle: • Corrosion-resistant steel buckle with a minimum breaking force of 18kN

Protective Sleeve: • PVC material for enhanced durability

Hooks: • Corrosion-resistant steel snap hooks with 20mm gate opening that can withstand a force of 22kN

LANYARD RANGE - **EXTENSIO RANGE**

CODE: LANY00210

DOUBLE LEG LANYARD



SPECIFIC FEATURES:

SIZING: • **1750MM**

STANDARDS: • SANS 50354 | EN 354 SANS 50355 | EN 355 EN 362

FEATURES: • Double leg with snap hooks
• Single leg with snap hook
• Shock absorber
• Supplied as a set of two

MATERIALS:

Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard Length: • 1 200mm when shock absorber is intact - 2700mm when shock absorber is fully deployed

Hooks: • Corrosion-resistant steel snap hooks with 20mm gate opening that can withstand a force of 22Kn

LANYARD RANGE - **EXTENSIO RANGE**

CODE: LANY01210

DOUBLE LEG LANYARD



SPECIFIC FEATURES:

SIZING: • **1750MM**

STANDARDS: • SANS 50354 | EN 354 SANS 50355 | EN 355 EN 362

FEATURES: • Double leg with snap hooks
• Single leg with snap hook
• Shock absorber

MATERIALS:

Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard Length: • 1 750mm when shock absorber is intact - 3 450mm when shock absorber is fully deployed

Hooks: • Corrosion-resistant steel snap hooks with 20mm gate opening that can withstand a force of 22Kn

LANYARD RANGE - **EXTENSIO RANGE**

CODE: LANY01220

DOUBLE LEG LANYARD



SPECIFIC FEATURES:

SIZING: • **1750mm**

STANDARDS: • SANS 50354 | EN 354
SANS 50355 | EN 355
EN 362

FEATURES:
- Double leg with scaff hooks
- Single leg with snap hook
- Shock absorber

MATERIALS:

Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard Length: • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed

Hooks: • Corrosion-resistant steel hooks:
- Scaffolding hooks: 50mm gate opening that can withstand a force of 23kN
- Snap hook: 20mm gate opening that can withstand a force of 22kN

LANYARD RANGE - **EXTENSIO RANGE**

CODE: LANY01420

ADJUSTABLE DOUBLE LEG LANYARD



SPECIFIC FEATURES:

SIZING: • **1750MM**

STANDARDS: • SANS 50354 | EN 354
SANS 50355 | EN 355
EN 362

FEATURES:
- Adjustable double leg with scaff hooks
- Single leg with screw gate carabiner
- Shock absorber

MATERIALS:

Webbing: • 25mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes

Lanyard Length: • 1 400mm - 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed

Buckles: • Corrosion-resistant steel buckles with minimum breaking force of 18kN

Hooks: • Corrosion-resistant steel scaffolding hooks: 50mm gate opening that can withstand a force of 23kN

Carabiner: • Corrosion-resistant steel screw gate carabiner: 23mm gate opening that can withstand a force of 23kN

LANYARD RANGE - **EXTENSIO RANGE**

CODE: LANY01610

ELASTICATED SINGLE LEG LANYARD



SPECIFIC FEATURES:

SIZING: • **1750MM**

STANDARDS: • SANS 50354 | EN 354
SANS 50355 | EN 355
EN 362

FEATURES:
- Elasticated single leg with scaff hook
- Single leg with snap hook
- Shock absorber

MATERIALS:

Webbing: • 25mm UV-resistant polyester webbing with a minimum breaking load of 2,6tonnes

Lanyard Length: • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed

Hooks: • Corrosion-resistant steel hooks:
- Scaffolding hook: 50mm gate opening that can withstand a force of 23kN
- Snap hook: 20mm gate opening that can withstand a force of 22kN

LANYARD RANGE - **EXTENSIO RANGE**

CODE: LANY01620

ELASTICATED DOUBLE LEG LANYARD



SPECIFIC FEATURES:

SIZING: • **1750MM**

STANDARDS: • SANS 50354 | EN 354
SANS 50355 | EN 355
EN 362

FEATURES:
- Elasticated double leg with scaff hooks
- Single leg with snap hook
- Shock absorber

MATERIALS:

Webbing: • 25mm UV-resistant polyester webbing with a minimum breaking load of 2,6tonnes

Lanyard Length: • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed

Hooks: • Corrosion-resistant steel hooks:
- Scaffolding hooks: 50mm gate opening that can withstand a force of 23kN
- Snap hook: 20mm gate opening that can withstand a force of 22kN

LANYARD RANGE - **SPECIALISED**

KHUMBA LANYARD - LANY05420

FIRE RETARDANT LANYARD



SPECIFIC FEATURES:

SIZING: • **1750MM**

STANDARDS:
- SANS 50354 | EN354
  SANS 50355 | EN355
  EN362

FEATURES:
- Adjustable double leg with Aluminum pylon hooks
- Single leg with auto-lock carabiner
- Shock absorber
- Fire retardant webbing

MATERIALS:

Webbing: • Fire retardant, 25mm Para-aramid/Meta-aramid blended webbing with a minimum breaking load of 2,6 tonnes

Lanyard Length: • 1 400mm - 1 750mm (when shock absorber is intact) - 3 450mm when shock absorber is fully deployed

Buckles: • Corrosion-resistant steel buckles with minimum breaking force of 18kN

Hooks: • Aluminum pylon hooks: 60mm gate opening that can withstand a force of 23kN

Carabiner: • Auto-Lock Carabiner: 20mm gate opening that can withstand a force of 22kN

LANYARD RANGE - **SPECIALISED**

CODE: LANY04220

WIRE ROPE LANYARD



SPECIFIC FEATURES:

SIZING: • **1750MM**

STANDARDS:
- SANS 50354 | EN 354
  SANS 50355 | EN 355
  EN 362

FEATURES:
- Double leg with scaffolding hooks
- Single leg with snap hook
- Shock absorber

MATERIALS:

Steel wire rope: • 1.2m eye to eye, thimble eye, 6mm to 8mm corrosion resistant feral cover wire ends. (This is not lifting equipment)>15kN

Lanyard Length: • 1 750mm when shock absorber is intact - 3 450mm when shock absorber is fully deployed

Hooks: • Corrosion-resistant steel hooks:
- Scaffolding hooks: 50mm gate opening that can withstand a force of 23kN
- Snap hooks: 20mm gate opening that can withstand a force of 22kN

LANYARD RANGE - **SPECIALISED**

SPARK - LANY05220

ARC / WELDING LANYARD



SPECIFIC FEATURES:

SIZING: • **1750MM**

STANDARDS:
- SANS 50354 | EN 354
  SANS 50355 | EN 355
  EN 362
  ASDM F887-13 | ATPV 40Cal/cm²

FEATURES:
- Double leg with Aluminium pylon hooks
- Single leg with Aluminium auto-lock carabiner
- Shock absorber
- Fire retardant & ARC flash rated webbing

MATERIALS:

Webbing: • Fire retardant & ARC flash rated webbing, 25mm Para-aramid/Meta-aramid blended webbing with a minimum breaking load of 2,6 tonnes

Shock cover: • Full grain leather sock to protect shock absorber from burns created by an ARC flash or sparks

Lanyard Length: • 1 750mm when shock absorber is intact - 3 450mm when shock absorber is fully deployed

Hooks: • Aluminum pylon hooks: 60mm gate opening that can withstand a force of 23kN

Carabiner: • Auto-Lock Carabiner: 20mm gate opening that can withstand a force of 22kN

ACCESSSORIES RANGE- **ENDLESS ROUND SLING**

CODE: ERCS01000

ENDLESS ROUND SLING



SPECIFIC FEATURES:

SIZING: • **1500mm**
STANDARDS: • SANS 50795 | EN 795
FEATURES: • 38mm seatbelt webbing encased into 50mm tubular webbing
• Supplied as a set of two

MATERIALS:

Webbing: • 45mm UV-resistant polyester webbing with a minimum breaking strength of
- Straight - 25kN
- Basket - 50kN
- Backlash - 20KN

Length: • 1500mm per sling

ACCESSSORIES RANGE-**ANCHOR STRAP**

CODE: ANST01000 | ANST01500

ANCHOR STRAP



SPECIFIC FEATURES:

SIZING: • **1000MM | 1500MM**
STANDARDS: • SANS 50795 | EN 795
FEATURES: • 44mm webbing with 2x steel D-rings

MATERIALS:

Steel wire rope: • 44mm webbing encased by a PVC cover for enhanced durability and improved safety
- Straight - 25kN
- Basket - 50kN
- Backlash - 20kN

Length: • 1000mm | 1500mm

ACCESSSORIES RANGE- **BASIC CLIMBING SLING**

CODE: SLNG01060 | SLNG 01120 | SLNG 01150

BASIC CLIMBING SLING



SPECIFIC FEATURES:

SIZING: • **600MM | 1200MM | 1500MM**
STANDARDS: • SANS 50795 | EN 795
FEATURES: • 25mm tubular endless round climbing sling

MATERIALS

Webbing: • 25mm tubular polyester webbing
- Straight - 25kN
- Basket - 50kN
- Backlash - 20KN

Length: • 600mm | 1200mm | 1500mm

BELT RANGE - **PADDED**

CODE: CLB01010

CAP LAMP BELT



SPECIFIC FEATURES:

SIZING:	• **ONE SIZE FITS ALL**
FEATURES:	• Rescue Pack and battery strap
	• Padded waist area
	• Adjustable strap

MATERIALS:

Padding:	• 5mm laminated foam to spread pressure over a larger area
Buckles:	• Interlocking, corrosion-resistant steel buckles

BELT RANGE - **LINESMAN**

CODE: LMB02070

LINESMAN BELT



SPECIFIC FEATURES:

SIZING:	• **ONE SIZE FITS ALL**
STANDARDS:	• SANS 50358
FEATURES:	• Full grain, adjustable leather with webbing
	• Padded waist area
	• Work positioning D-rings
	• 7 steel attachment points and 8 leather loops for tools and accessories

MATERIALS

Webbing:	• 45mm UV-Resistant polyester webbing with a minimum breaking load of 2,6 tonnes
Leather:	• Full Grain Leather
Padding:	• 5mm laminated foam to spread pressure over a larger area
D- Rings:	• Corrosion-resistant steel D-rings that can with stand a force of 18kN

LIFELINES RANGE - **TEMPORARY HORIZONTAL LIFELINE**

CODE: TLLH01020

TEMPORARY HORIZONTAL LIFELINE



SPECIFIC FEATURES:

SIZING:	• **20M LIFELINE**
STANDARDS:	• SANS 50795 | EN 795 / EN 362
FEATURES:	• 1x 20m Webbing line with snap hooks on either end
	• 1x Ratchet tensioning system
	• 2x Anchor straps
	• 1x Equipment carry bag

MATERIALS:

Webbing:	• 50mm UV-Resistant polyester webbing with a minimum breaking load of 40kN
Hooks:	• Corrosion-resistant steel snap hooks with a 20mm gate opening that can withstand a force of 22kN
Ratchet:	• Corrosion-resistant steel ratchet
Anchor Straps:	• 45mm UV-Resistant polyester webbing with a minimum breaking load of 2.6 tonnes
	• PVC protective sleeve
	• Corrosion-resistant steel D-rings with a minimum breaking load of 25kN

LIFELINES RANGE - **TEMPORARY VERTICAL LIFELINE**

CODE: TLLV01020

TEMPORARY VERTICAL LIFELINE



SPECIFIC FEATURES:

SIZING:	• **20M LIFELINE**
STANDARDS:	• EN353-2
FEATURES:	• 1 x 20m Kernmantle rope
	• 1 x Plastic rope thimble
	• 1 x Mobile fall arrestor
	• 2 x Carabiners
	• 1 x Anchor strap
	• 1 x Equipment carry bag

MATERIALS:

Rope:	• 11mm Kernmantle rope with a minimum breaking load of 28kN
Mobile Fall Arrester:	• Aluminium rope grab with a minimum breaking load of 15kN.
Carabiners:	• Aluminium screw gate carabiners with a minimum breaking load of 22kN
Anchor Strap:	• 45mm UV-Resistant polyester webbing with a minimum breaking load of 2.6 tonnes - PVC protective sleeve - Corrosion-resistant steel D-rings with a minimum breaking load of 25kN

BOVA

WORKWEAR

QUALITY ENGINEERING THAT FITS



ENGINEERED WITH PURPOSE

CONTI SUIT RANGE - **65/35 POLY COTTON**

CODE: OJ12927



YKK ZIP

TRIPLE STITCHING

SPECIFIC FEATURES:

FABRIC: • **65/35 POLY COTTON**
COLOURS: • Black | Grey | Navy | Royal Blue
SIZES: • 32 - 60

CONTI SUIT RANGE - **65/35 POLY COTTON**

CODE: OT12935



YKK ZIP

TRIPLE STITCHING

SPECIFIC FEATURES:

FABRIC: • **65/35 POLY COTTON**
COLOURS: • Black | Grey | Navy | Royal Blue
SIZES: • 28 - 56

CONTI SUIT RANGE - **65/35 POLY COTTON**

CODE: OJ12928



VIZLITE™

YKK ZIP

TRIPLE STITCHING

SPECIFIC FEATURES:

FABRIC: • **65/35 POLY COTTON**
REFLECTIVE: • 19mm VizLite™ reflective tape - Lime/Silver/Lime
COLOURS: • Black | Grey | Navy | Royal Blue
SIZES: • 32 - 60

CONTI SUIT RANGE - **65/35 POLY COTTON**

CODE: OT12936



VIZLITE™

YKK ZIP

TRIPLE STITCHING

SPECIFIC FEATURES:

FABRIC: • **65/35 POLY COTTON**
REFLECTIVE: • 19mm VizLite™ reflective tape - Lime/Silver/Lime
COLOURS: • Black | Grey | Navy | Royal Blue
SIZES: • 28 - 56

CONTI SUIT RANGE - **65/35 POLY COTTON**

CODE: OJ13070



YKK ZIP

TRIPLE STITCHING

MTO

SPECIFIC FEATURES:

FABRIC: • **65/35 POLY COTTON**
COLOUR: • Bottle Green & Khaki | Navy & Khaki | Stone & Khaki
SIZES: • 32- 60

CONTI SUIT RANGE - **65/35 POLY COTTON**

CODE: OT13071



YKK ZIP

TRIPLE STITCHING

MTO

SPECIFIC FEATURES:

FABRIC: • **65/35 POLY COTTON**
COLOUR: • Bottle Green & Khaki | Navy & Khaki | Stone & Khaki
SIZES: • 28 - 56

CONTI SUIT RANGE - **POLYVISCOSE**

CODE: OJ12926



YKK ZIP

TRIPLE STITCHING

ACID RESISTANT

SPECIFIC FEATURES:

FABRIC: • **POLY VISCOSE ACID RESISTANT**
COLOUR: • Bottle Green
SIZES: • 32 - 60

CONTI SUIT RANGE - **POLYVISCOSE**

CODE: OT12934



YKK ZIP

TRIPLE STITCHING

ACID RESISTANT

SPECIFIC FEATURES:

FABRIC: • **POLY VISCOSE ACID RESISTANT**
COLOUR: • Bottle Green
SIZES: • 28 - 56

CONTI SUIT RANGE - **J54 100% COTTON**

CODE: OJ12931



YKK ZIP

TRIPLE STITCHING

DA GAMA TEXTILES

SABS APPROVED

100% COTTON

SPECIFIC FEATURES:

FABRIC: • **J54 100% COTTON**
COLOUR: • Navy | Royal Blue
SIZES: • 32 - 60

CONTI SUIT RANGE - **J54 100% COTTON**

CODE: OT12940



YKK ZIP

TRIPLE STITCHING

DA GAMA TEXTILES

SABS APPROVED

100% COTTON

SPECIFIC FEATURES:

FABRIC: • **J54 100% COTTON**
COLOUR: • Navy | Royal Blue
SIZES: • 28 - 56

CONTI SUIT RANGE - **J54 100% COTTON**

CODE: OJ12932



VIZLITE™

YKK ZIP

TRIPLE STITCHING

DA GAMA TEXTILES

SABS APPROVED

100% COTTON

SPECIFIC FEATURES:

FABRIC: • **J54 100% COTTON**
REFLECTIVE: • 19mm VizLite™ reflective tape - Lime/Silver/Lime
COLOUR: • Navy | Royal Blue
SIZES: • 32 - 60

CONTI SUIT RANGE - **J54 100% COTTON**

CODE: OT12939



VIZLITE™

YKK ZIP

TRIPLE STITCHING

DA GAMA TEXTILES

SABS APPROVED

100% COTTON

SPECIFIC FEATURES:

FABRIC: • **J54 100% COTTON**
REFLECTIVE: • 19mm VizLite™ reflective tape - Lime/Silver/Lime
COLOUR: • Navy | Royal Blue
SIZES: • 28 - 56

CONTI SUIT RANGE - **DENIM 100% COTTON**

CODE: OJ12925



VIZLITE™ · YKK ZIP · TRIPLE STITCHING · 100% COTTON

SPECIFIC FEATURES:

FABRIC: • **100% COTTON**
REFLECTIVE: • 19mm VizLite™ reflective tape - Lime/Silver/Lime
COLOUR: • Denim
SIZES: • 32 - 60

CONTI SUIT RANGE - **D59 100% COTTON**

CODE: OJ12930



VIZLITE™ · YKK ZIP · TRIPLE STITCHING · DA GAMA TEXTILES · FLAME RETARDANT ACID RESISTANT

SPECIFIC FEATURES:

FABRIC: • **D59 100% COTTON FLAME RETARDANT & ACID RESISTANT**
REFLECTIVE: • 48mm VizLite™ reflective tape
COLOURS: • Navy
SIZES: • 32 - 60

CONTI SUIT RANGE - **HIGH VIZ**

CODE: OJ13072



MTO · HIGH VIZ · YKK ZIP · TRIPLE STITCHING · VIZLITE™

SPECIFIC FEATURES:

FABRIC: • **LUMINOUS FABRIC - 50/50 POLY COTTON**
• **BASE FABRIC - 65/35 POLY COTTON**
REFLECTIVE: • 50mm VizLite™ reflective tape
COLOURS: • Navy & Lime | Navy & Orange
SIZES: • 32 - 60

CONTI SUIT RANGE - **DENIM 100% COTTON**

CODE: OT12933



VIZLITE™ · YKK ZIP · TRIPLE STITCHING · 100% COTTON

SPECIFIC FEATURES:

FABRIC: • **100% COTTON**
REFLECTIVE: • 19mm VizLite™ reflective tape - Lime/Silver/Lime
COLOUR: • Denim
SIZES: • 28 - 56

CONTI SUIT RANGE - **D59 100% COTTON**

CODE: OT12938



VIZLITE™ · YKK ZIP · TRIPLE STITCHING · DA GAMA TEXTILES · FLAME RETARDANT ACID RESISTANT

SPECIFIC FEATURES:

FABRIC: • **D59 100% COTTON FLAME RETARDANT & ACID RESISTANT**
REFLECTIVE: • 48mm VizLite™ reflective tape
COLOURS: • Navy
SIZES: • 28 - 56

CONTI SUIT RANGE - **HIGH VIZ**

CODE: OT13075



MTO · HIGH VIZ · YKK ZIP · TRIPLE STITCHING · VIZLITE™

SPECIFIC FEATURES:

FABRIC: • **LUMINOUS FABRIC - 50/50 POLY COTTON**
• **BASE FABRIC - 65/35 POLY COTTON**
REFLECTIVE: • 50mm VizLite™ reflective tape
COLOURS: • Navy & Lime | Navy & Orange
SIZES: • 28 - 56

BOILER SUIT RANGE - **J54 100% COTTON**

CODE: OB12922



YKK ZIP
TRIPLE STITCHING
VIZLITE™
DA GAMA TEXTILES
SABS APPROVED
100% COTTON

SPECIFIC FEATURES:

FABRIC: • **J54 100% COTTON**
REFLECTIVE: • 19mm VizLite™ reflective tape
COLOUR: • Navy
SIZES: • 32 - 60

BOILER SUIT RANGE - **D59 100% COTTON**

CODE: OB12921



YKK ZIP
TRIPLE STITCHING
DA GAMA TEXTILES
VIZLITE™
SABS APPROVED
2-WAY YKK ZIP
flame retardant acid resistant
FLAME RETARDANT ACID RESISTANT
100% COTTON

SPECIFIC FEATURES:

FABRIC: • **D59 100% COTTON FLAME RETAR DANT & ACID RESISTANT**
REFLECTIVE: • 48mm VizLite™ reflective tape
COLOUR: • Navy
SIZES: • 32 - 60

DUST COAT RANGE - **65/35 POLY COTTON**

CODE: OD13069



SPECIFIC FEATURES:

FABRIC: • **65/35 POLY COTTON**
COLOUR: • Grey | Navy | Royal Blue | White
SIZES: • 32 - 60

DUST COAT RANGE - **65/35 POLY COTTON**

CODE: OD13068



ACID RESISTANT

SPECIFIC FEATURES:

FABRIC: • **65/35 POLY COTTON ACID RESISTANT**
COLOUR: • White
SIZES: • 32 - 60

HIGH VISIBILITY SHIRTS RANGE

CODE: OS13077



HIGH VIZ
VIZLITE™
100% COTTON

SPECIFIC FEATURES:

FABRIC: • **LUMINOUS FABRIC - 50/50 POLY COTTON**
• **BASE FABRIC - 100% COTTON**
REFLECTIVE: • 48mm VizLite™ reflective tape
COLOURS: • Navy & High VIZ Yellow | Navy & High VIZ Orange
SIZES: • 32 - 60

65/35 POLY COTTON:
This fabric comprises 35% cotton and 65% polyester. Cotton is a natural fibre that is known for its breathability, while polyester is a man-made fibre that is known for its resilience and washability. When polyester is blended with cotton, the resultant fabric offers better crease resistance.

J54:
This fabric is made from 100% cotton and is SABS approved. As a natural fibre, cotton is soft, highly breathable and acts as an insulator. The benefit of this fabric is that the wearer will remain cool in the summer months and warm in winter.

D59:
This fabric is made from 100% cotton and is SABS approved. The fabric is treated with either an acid resistant or flame retardant or both acid resistant and flame retardant finish, depending on the wearer's requirements.

POLY VISCOSE:
This fabric is made from a combination of polyester and viscose. Similar to cotton in its feel, the material is man-made and absorbs perspiration quickly, making it skin-friendly, but with little thermal properties.

HIGH VIZ:
The luminous fabric used in our High VIZ range comprises 50% polyester and 50% cotton. This is a highly visible fabric that offers extreme visibility in low to no light conditions. This fabric is applied to one or two types of base fabrics; either 65/35 poly cotton or 100% cotton.

SIZE CHART

JACKETS

CHEST MEASUREMENTS

INCHES	32	34	36	38	40	42	44
CM	82	87	92	97	102	107	112
SIZE	XS	S		M		L	

INCHES	46	48	50	52	54	56	58	60
CM	117	122	127	132	137	142	147	152
SIZE	XL		XXL		XXXL		XXXXL	

NOTE: Jackets are to be ordered by chest size and trousers to be ordered by waist size.
Use trouser's waist measurement and increase by two sizes to determine corresponding jacket chest size.

TROUSERS

WAIST MEASUREMENTS

INCHES	28	30	32	34	36	38	40
CM	72	77	82	87	92	97	102

INCHES	42	44	46	48	50	52	54	56
CM	107	112	117	122	127	132	137	142

NOTE: Trousers to be ordered by waist size and jackets to be ordered by chest size. Use trouser's waist measurement and increase by two sizes to determine corresponding jacket chest size.

BOILER SUITS

CHEST MEASUREMENTS

INCHES	30	32	34	36	38	40	42
CM	77	82	87	92	97	102	107
SIZE	XS	S		M		L	

INCHES	44	46	48	50	52	54	56	58	60	62
CM	112	117	122	127	132	137	142	147	152	157
SIZE	XL		XXL		XXXL		XXXXL		XXXXXL	

CORRELATING WAIST MEASUREMENT:

INCHES	28	30	32	34	36	38	40
CM	72	77	82	87	92	97	102

INCHES	42	44	46	48	50	52	54	56	58
CM	107	112	117	122	127	132	137	142	147

NOTE: Boiller suits to be ordered by chest measurement. Check chest measurement table for corresponding waist size. Use trouser's waist measurement and increase by two sizes to determine corresponding jacket chest size.

CHEMICAL RESISTANCE TABLE

THIS TABLE IS ONLY RELEVANT TO POLYURETHANE (PU) SOLES

1 O/A DISSOLVES

2 O/A POOR more than 30% change

3 O/A FAIR 16 - 30% change

4 O/A GOOD 4 - 15% change


5 O/A EXCELLENT 0.3% change

Acetic Acid 3 n	3	Diesel Oil	5	Methyl Glycol	2
Acetone	2	Dimethyl Acetamide	1	Methyl Glycol Acetate	2
Aluminium Chloride 10% Sol.	4	Dimethyl Formamide	1	Methylene Chloride	2
Ammonia 3 n	5	Distilled Water	5	Mineral Oil	5
Ammonium Chloride 10% Sol.	5	Ethanol	3	Nitric Acid 3 n	1
Aniline	2	Ether	3	N-Methyl Pyrrolidone	1
ASTM-Fuel A	5	Ethyl Acetate	2	Ozone	5
ASTM-Fuel B	4	Ethylene Chloride	3	Paraffin Oil	5
ASTM-Fuel C	3	Ferric Chloride 10% Sol.	4	Perchloreothylene	2
ASTM-Oil 1	5	Formic Acid 3 n	2	Petroleum	5
ASTM-Oil 2	5	Freon 12	3	Petroleum Ether	5
ASTM-Oil 3	5	Freon 22	3	Phosphoric Acid 3 n	3
Benzene	2	Gear Box Oil SAE 90	5	Potassium Chloride 10% & 40% Sol.	5
Benzyl Alcohol	1	Glycerine	5	Potassium Dichromate 10% Sol.	5
Bleach	5	Glycol	5	Potassium Hydroxide 3 n	5
Brake Fluid ATE	5	Hydrochloric Acid 3 n	5	Potassium Nitrate	4
Brake Fluid ATS	5	Hydrogen Peroxide 3%	5	Potassium Permanganate 5% Sol.	2
Butane	4	Iso-Octane Fuel 1	5	Propane	4
Butyl Acetate	2	Iso-Octane 70% : 30% Toluene = Fuel 2	4	Pyridine	1
Butyl Alcohol	3	Iso-Octane 50% : 50% Toluene = Fuel 3	3	Sea Water (Technical)	5
Calcium Chloride 10% & 40% Sol.	5	Iso-Propanol	4	Sodium Bisulphate 10% Sol.	4
Carbon Disulphide	3	Kerosine	5	Sodium Chloride 10% Sol.	5
Carbon Tetrachloride	2	Lactic Acid 3 n	1	Sodium Hypochlorite Sol. PH 13	3
Caustic Soda Sol. 10%	5	Lubricating Grease: Calcium based	5	Sodium Sulphite	4
Chlorobenzene	2	: Lithium based	5	Sulphuric Acid 3 n	1
Chloroform	2	: Sodium based	5	Terpentine (Pine Oil)	4
Chromic Acid 3 n	2	Magnesium Chloride 10% & 30% Sol.	5	Tetrachloreothylene	2
Citronic Acid 3 n	4	Methane	4	Tetrahydrofuran	2
Cyclohexane	4	Methanol	4	Toluene	2
Cyclohexanon	2	Methyl Acetate	2	Trichloroethylene	2
Decalin	3	Methyl Ethyl Ketone	2	Xylene	2

If you are exposed to any of the acids, oils or chemicals that rate 1, 2 or 3 on the table we recommend a rubber sole shoe/boot. Please consult the Extremewear section.

The above table should be used as a general guide only. Performance in the actual working environment will depend upon the following: temperature of chemicals, concentrations of chemicals and duration of exposure.

NOTES

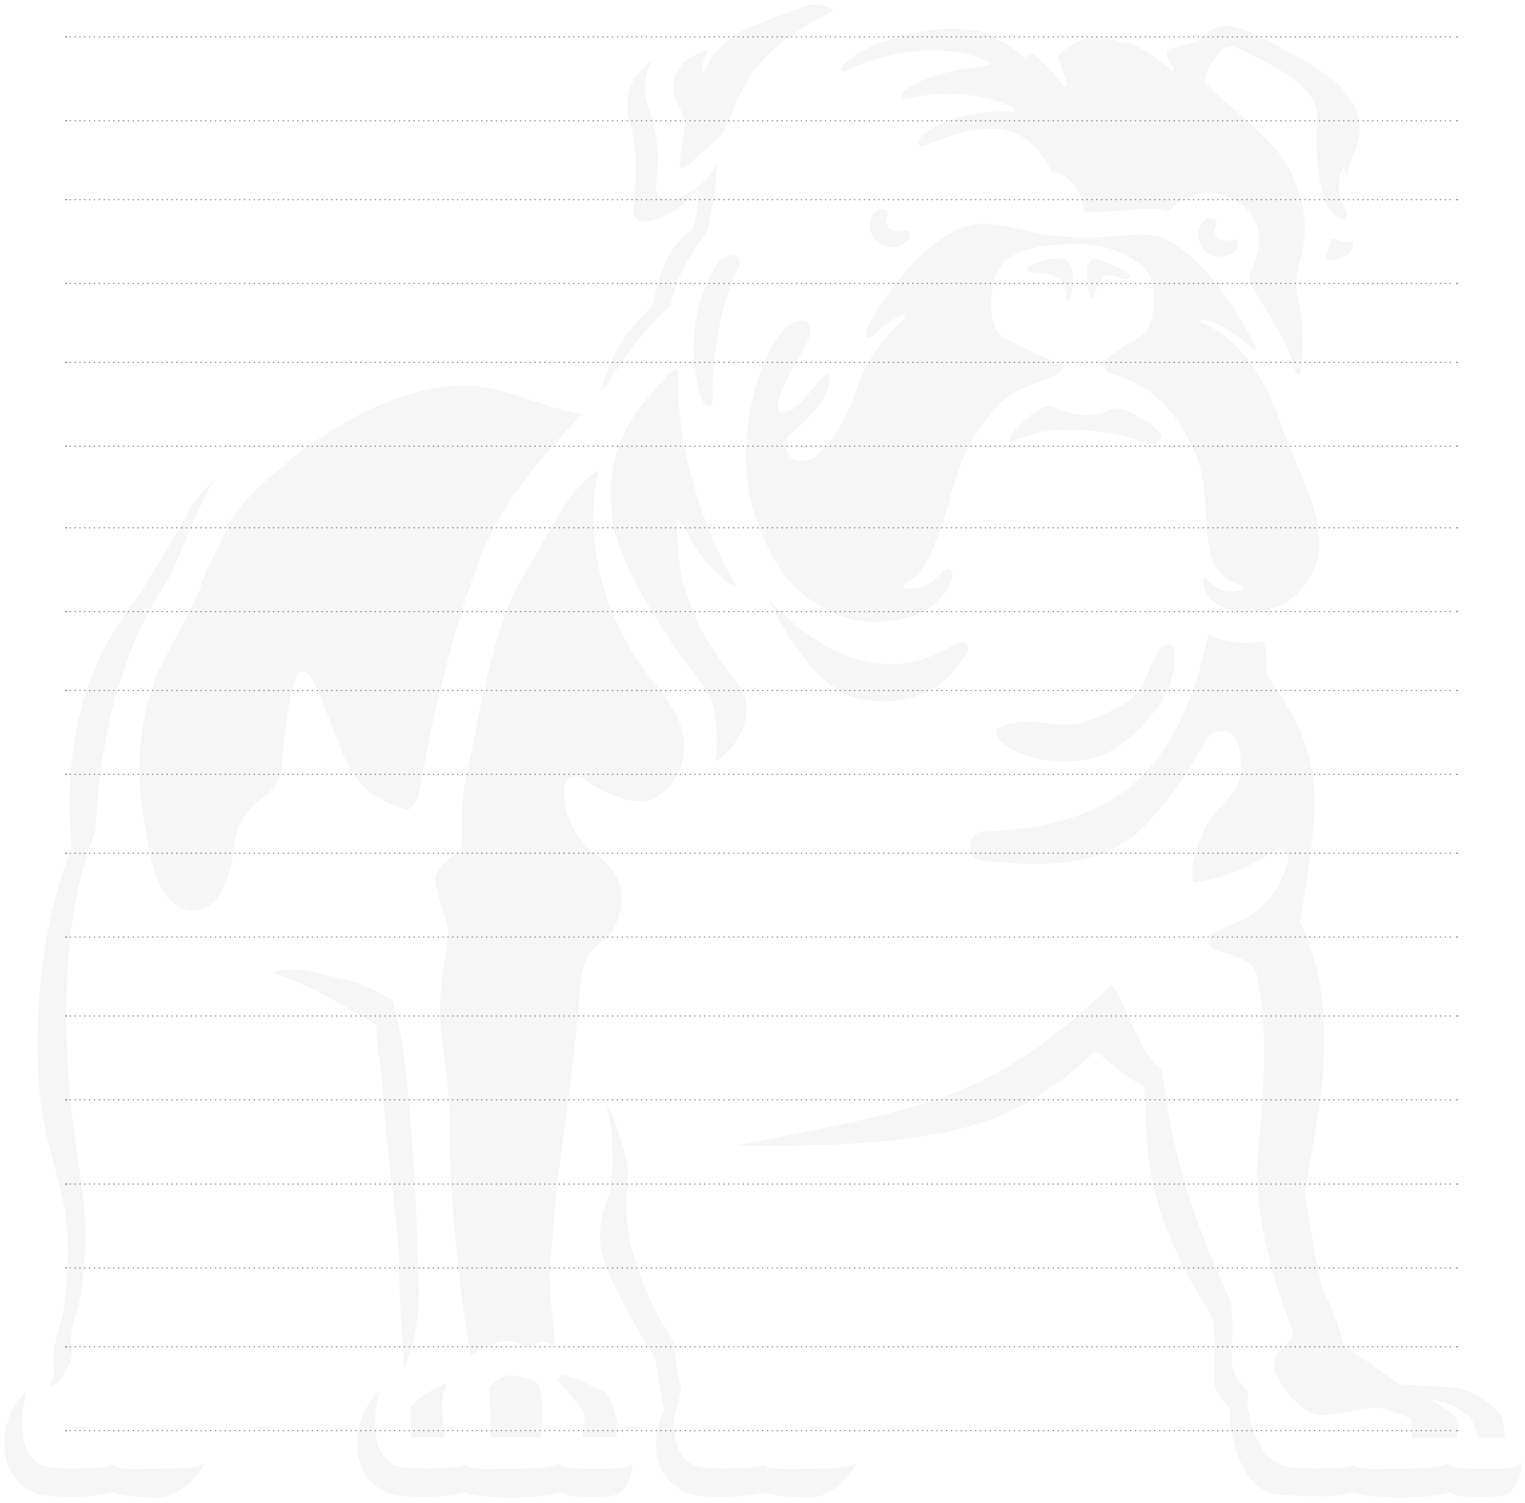

BOVA

SAFETY WEAR

ENGINEERED WITH PURPOSE

KZN SAFETY AND GEAR

Cell: 068 174 7876

Mail: info@kznsafetyandgear.co.za

Web: www.kznsafetyandgear.co.za